



The *professional* solution for  
low-clearance bolting applications.  
Rigid steel design guarantees  
durability, reliability and safety.

▼ Shown: Drive units with interchangeable cassettes



## The *Professional* Low Profile Solution



### LP-Series, Low Profile Wrenches

This product range has been designed using state-of-the-art techniques to bring you the most advanced low profile torque wrench on the market. Safety, quality, toughness and reliability are built in.

During the design process every prototype was put through finite element analysis (FEA), photo-elastic modeling, rigorous cyclic testing and strain gauging.



### Special Design Service

Should you have an application where it is not possible to use the standard range of tools, then we invite you to draw on our extensive experience in providing tailor-made solutions to problems involving bolted joints.



### Versatility

- Quick Release interchangeable low profile drive unit can be used to drive any head within that torque range.
- Single 360° hydraulic swivel manifold complete with screw lock couplings increases wrench and hose maneuverability.

### Simplicity

- No tools are needed for changing the heads
- Innovative, pinless wrench construction incorporates quick release cylinder and automatic crank engagement

### Design

- Cylinders and low profile heads have been engineered to give ultra slim, compact, low clearance tools with a small nose radius
- Robust design with minimal parts enables easy on-site maintenance without special tools
- Covers nut sizes from 17/16 - 45/8 inch AF (36 – 115 mm)
- Optimized strength-to-weight ratio
- Fast operation due to the extensive nut rotation per cycle (30° rotation angle) and rapid return stroke

### Reliability

- All wrenches are nickel-plated for excellent corrosion protection and improved durability in harsh environments
- All wrenches are fitted with bronze bushings to ensure the ratchet will never seize in the sideplates, thus eliminating costly repairs

### Accuracy


- Constant torque output provides high accuracy across the full stroke
- In-line reaction foot ensures accuracy by reducing internal deflections

# Double-acting Hydraulic Hexagon Torque Wrenches



## Accessories

The full range of reduced hex ratchets and hex reducing inserts is available. For more information, contact your local Enerpac office.

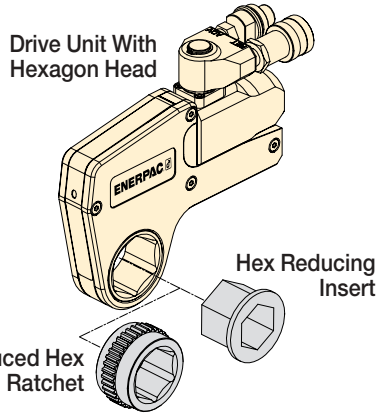

## LP Series



Maximum Torque at 10,000 psi:

**15,000 Ft.lbs**

Hexagon Range:

**1<sup>7</sup>/<sub>16</sub> - 4<sup>5</sup>/<sub>8</sub> inches**

Nose Radius:

**1.22 - 3.44 inches**

Maximum Operating Pressure:

**10,000 psi**

### ▼ METRIC SIZES

Drive Unit Model No.	Hexa-gon Size	Nose Radius H	Inter-change-able Head Model No.	G	Wt.
	(mm)	(in)			
<b>W2000</b> (2000 Ft.lbs)	36	1.22	<b>W2107</b>	2.11	4.2
	41	1.32	<b>W2110</b>	2.29	4.4
	46	1.44	<b>W2113</b>	3.38	4.4
	50	1.54	<b>W2200</b>	2.48	4.4
	55	1.65	<b>W2203</b>	2.70	4.6
<b>W4000</b> (4000 Ft.lbs)	55	1.73	<b>W4203</b>	2.89	8.4
	60	1.83	<b>W4206</b>	2.78	8.6
	65	1.93	<b>W4209</b>	3.00	8.6
	70	2.07	<b>W4212</b>	3.08	8.8
	75	2.19	<b>W4215</b>	3.21	9.0
	80	2.30	<b>W4302</b>	3.29	9.3
<b>W8000</b> (8000 Ft.lbs)	70	2.20	<b>W8212</b>	3.34	17.2
	75	2.28	<b>W8215</b>	3.35	17.2
	80	2.38	<b>W8302</b>	3.52	17.4
	85	2.60	<b>W8085M</b>	3.63	17.9
	90	2.91	<b>W8090M</b>	4.05	19.2
<b>W15000</b> (15000 Ft.lbs)	95	2.91	<b>W8095M</b>	4.05	19.4
	80	2.54	<b>W15302</b>	3.66	30.2
	85	2.74	<b>W15085M</b>	3.80	28.7
	90	2.95	<b>W15090M</b>	4.01	31.8
	95	2.95	<b>W15095M</b>	4.01	32.0
	105	3.17	<b>W15105M</b>	4.06	32.4
	110	3.44	<b>W15110M</b>	4.52	33.1
115	3.44	<b>W15115M</b>	4.52	33.7	

### ▼ INCH SIZES


Hexa-gon Size	Nose Radius H	Inter-change-able Head Model No.	G	Wt.
1 <sup>7</sup> / <sub>16</sub>	1.22	<b>W2107</b>	2.11	4.2
1 <sup>5</sup> / <sub>8</sub>	1.32	<b>W2110</b>	2.29	4.4
1 <sup>13</sup> / <sub>16</sub>	1.44	<b>W2113</b>	3.38	4.4
2	1.54	<b>W2200</b>	2.48	4.4
2 <sup>3</sup> / <sub>16</sub>	1.65	<b>W2203</b>	2.70	4.6
2 <sup>3</sup> / <sub>16</sub>	1.73	<b>W4203</b>	2.89	8.4
2 <sup>3</sup> / <sub>8</sub>	1.83	<b>W4206</b>	2.78	8.6
2 <sup>9</sup> / <sub>16</sub>	1.93	<b>W4209</b>	3.00	8.6
2 <sup>3</sup> / <sub>4</sub>	2.07	<b>W4212</b>	3.08	8.8
2 <sup>15</sup> / <sub>16</sub>	2.19	<b>W4215</b>	3.21	9.0
3 <sup>1</sup> / <sub>8</sub>	2.30	<b>W4302</b>	3.29	9.3
2 <sup>3</sup> / <sub>4</sub>	2.20	<b>W8212</b>	3.34	17.2
2 <sup>15</sup> / <sub>16</sub>	2.28	<b>W8215</b>	3.35	17.2
3 <sup>1</sup> / <sub>8</sub>	2.38	<b>W8302</b>	3.52	17.4
3 <sup>1</sup> / <sub>2</sub>	2.60	<b>W8308I</b>	3.63	17.9
3 <sup>7</sup> / <sub>8</sub>	2.91	<b>W8314I</b>	4.05	19.2
-	-	-	-	-
3 <sup>1</sup> / <sub>8</sub>	2.54	<b>W15302</b>	3.66	30.2
3 <sup>1</sup> / <sub>2</sub>	2.74	<b>W15308I</b>	3.80	28.7
3 <sup>7</sup> / <sub>8</sub>	2.95	<b>W15314I</b>	4.01	31.8
-	-	-	-	-
4 <sup>1</sup> / <sub>4</sub>	3.17	<b>W15404I</b>	4.06	32.4
-	-	-	-	-
4 <sup>5</sup> / <sub>8</sub>	3.44	<b>W15410I</b>	4.52	33.7



## Optimum Torque Wrench and Pump Combinations

For optimum speed and performance Enerpac recommends the following pump and torque wrench combination:

Wrench Model	Electric Pump Series	Air Pump Series
<b>W2000</b>	PMU-10	-
<b>W4000</b>	PMU-10	-
<b>W8000</b>	PMU-30	ZU4T-Q
<b>W15000</b>	PMU-30	ZU4T-Q

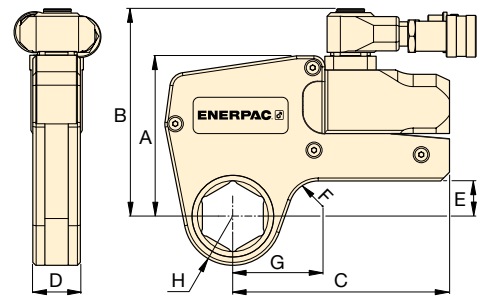

### ▼ SELECTION CHART

Hex Cassette Range *		Maximum Torque at 10,000 psi	Drive Unit Model No.	Minimum Torque	LP-Series Dimensions (in)						Weight** drive unit without hexagon head
(in)	(mm)				(Ft.lbs)	(Ft.lbs)	A	B	C	D	
1 <sup>7</sup> / <sub>16</sub> - 2 <sup>3</sup> / <sub>16</sub>	36 - 55	2000	<b>W2000</b>	200	4.29	5.55	5.83	1.26	.94	.79	3.1
2 <sup>3</sup> / <sub>16</sub> - 3 <sup>1</sup> / <sub>8</sub>	55 - 80	4000	<b>W4000</b>	400	5.35	6.57	7.01	1.61	1.29	.79	4.4
2 <sup>3</sup> / <sub>4</sub> - 3 <sup>7</sup> / <sub>8</sub>	70 - 95	8000	<b>W8000</b>	800	6.77	8.07	8.19	2.07	1.65	.98	6.6
3 <sup>1</sup> / <sub>8</sub> - 4 <sup>5</sup> / <sub>8</sub>	80 - 115	15,000	<b>W15000</b>	1500	8.15	9.45	9.96	2.48	1.97	.79	11.0

\* With in-line reaction foot.

\*\* For total wrench weight, add value for Hex Head from above.

# Hydraulic Torque Wrenches



**ENERPAC**

## The Industrial Tools Line

### Cylinders

- General Purpose
- Pancake
- Aluminium Lightweight
- Low Height
- Heavy Duty
- Hollow Plunger
- Industrial
- Pull
- Long Stroke
- Jacks
- Spread

### Pumps

- Manual
- Electric Driven
- Compressed Air Driven
- Petrol Driven

### System Components

- Hoses, Couplers, Oil
- Gauges, Adaptors
- Manifolds, Fittings

### Valves

- 3-and 4-Way Directional
- Pressure and Flow Control

### Presses

- Bench and Workshop
- Roll Frame Presses
- Arbor and C-Clamps

### Pullers

- Master Pullers Sets
- Multi Purpose Puller Sets
- Posi Lock® Pullers

### Tools

- Maintenance Sets
- Punches
- Machine Lifts
- Load Skates
- Cutters
- Pipe Benders

### Bolting Tools

- Nut Splitters
- Flange/Wedge Spreaders
- Flange Alignment Tools
- Torque Wrenches
- Hydraulic Wrench Pumps
- Twin Safety Hoses

### Integrated Hydraulic Solutions

- Stage Lift Systems
- Synchronous Lifting Systems
- Synchronous Hoisting Systems

## Enerpac Worldwide Locations

### Africa

ENERPAC Middle East FZE  
P.O. Box 18004  
Jebel Ali, Dubai  
United Arab Emirates  
Tel: +971 (0)4 8872686  
Fax: +971 (0)4 8872687

### Australia

Actuant Australia Ltd.  
Block V Unit 3  
Regents Park Estate  
391 Park Road  
Regents Park NSW 2143  
(P.O. Box 261) Australia  
Tel: +61 297 438 988  
Fax: +61 297 438 648

### Brazil

Power Packer do Brasil Ltda.  
Rua dos Inocentes, 587  
04764-050 - Sao Paulo (SP)  
Tel: +55 11 5687 2211  
Fax: +55 11 5686 5583  
Toll Free in Brazil:  
Tel: 0800 891 5770  
vendasbrasil@enerpac.com

### Canada

Actuant Canada Corporation  
6615 Ordan Drive, Unit 14-15  
Mississauga, Ontario L5T 1X2  
Tel: +1 905 564 5749  
Fax: +1 905 564 0305  
Toll Free:  
Tel: +1 800 268 4987  
Fax: +1 800 461 2456  
Technical Inquiries:  
techservices@enerpac.com

### China

Actuant China Ltd.  
1F, 269 Fute N. Road  
Waigaoqiao Free Trade Zone  
Pudong New District  
Shanghai, 200 131 China  
Tel: +86 21 5866 9099  
Fax: +86 21 5866 7156

Actuant China Ltd. (Beijing)  
709A Xin No. 2  
Diyang Building  
Dong San Huan North Rd.  
Beijing City  
100028 China  
Tel: +86 10 845 36166  
Fax: +86 10 845 36220

### Central and Eastern Europe

ENERPAC B.V.  
Galvanistraat 115  
P.O. Box 8097  
6710 AB Ede  
The Netherlands  
Tel: +31 318 535 936  
Fax: +31 318 535 951

### France

ENERPAC  
Une division de ACTUANT  
France S.A.  
B.P. 200, Parc d'Activités  
du Moulin de Massy  
F-91882 Massy CEDEX France  
Tel: +33 1 601 368 68  
Fax: +33 1 692 037 50

### Germany, Austria, Greece

and Switzerland  
ENERPAC GmbH  
P.O. Box 300113  
D-40401 Düsseldorf  
Germany  
Tel: +49 211 471 490  
Fax: +49 211 471 49 28

### India

ENERPAC Hydraulics  
(India) Pvt. Ltd.  
Office No. 9,10 & 11,  
Plot No. 56, Monarch Plaza,  
Sector 11, C.B.D. Belapur  
Navi Mumbai 400614, India  
Tel: +91 22 2756 6090  
Tel: +91 22 2756 6091  
Fax: +91 22 2756 6095

### Italy

ENERPAC S.p.A.  
Via Canova 4  
20094 Corsico (Milano)  
Tel: +39 02 4861 111  
Fax: +39 02 4860 1288

### Japan

Applied Power Japan Ltd.  
1-1-11, Shimomae  
Toda-shi  
Saitama Pref.  
Japan 335-0016  
Tel: +81 484 30 1055  
Fax: +81 484 30 1066

### Middle East, Turkey and Caspian Sea

ENERPAC Middle East FZE  
P.O. Box 18004  
Jebel Ali, Dubai  
United Arab Emirates  
Tel: +971 (0)4 8872686  
Fax: +971 (0)4 8872687

### Russia and CIS

(excl. Caspian Sea Countries)  
Actuant LLC  
Admiral Makarov Street 8  
125212 Moscow, Russia  
Tel: +7-095-9809091  
Fax: +7-095-9809092

### Singapore

Actuant Asia Pte. Ltd.  
25 Serangoon North Ave. 5  
#03-01 Keppel Digihub  
Singapore 554914  
Thomson Road  
P.O. Box 114  
Singapore 915704  
Tel: +65 64 84 5108  
+65 64 84 3737  
Fax: +65 64 84 5669  
Toll Free:  
Tel: +1800 363 7722  
Technical Inquiries:  
techsupport@enerpac.com.sg

### South Korea

Actuant Korea Ltd.  
3Ba 717,  
Shihwa Industrial Complex  
Jungwang-Dong, Shihung-Shi,  
Kyunggi-Do  
Republic of Korea 429-450  
Tel: +82 31 434 4506  
Fax: +82 31 434 4507

### Spain and Portugal

ENERPAC  
C/San José Artesano 8  
Pol. Ind.  
28108 Alcobendas  
(Madrid) Spain  
Tel: +34 91 661 11 25  
Fax: +34 91 661 47 89

### The Netherlands, Belgium, Luxembourg, Sweden, Denmark, Norway, Finland and Baltic States

ENERPAC B.V.  
Galvanistraat 115  
P.O. Box 8097, 6710 AB Ede  
The Netherlands  
Tel: +31 318 535 911  
Fax: +31 318 525 613  
+31 318 535 848

Technical Inquiries Europe:  
techsupport.europe@enerpac.com

### United Kingdom, Ireland

ENERPAC Ltd., P.O. Box 33  
New Romney, TN28 8QF  
United Kingdom  
Tel: +44 1527 598 900  
Fax: +44 1527 585 500

### USA, Latin America and Caribbean

ENERPAC  
P.O. Box 3241  
6100 N. Baker Road  
Milwaukee, WI 53209 USA  
Tel: +1 262 781 6600  
Fax: +1 262 783 9562

User inquiries:  
+1 800 433 2766  
Distributor inquiries/orders:  
+1 800 558 0530  
Technical Inquiries:  
techservices@enerpac.com

e-mail: [info@enerpac.com](mailto:info@enerpac.com)  
Internet: [www.enerpac.com](http://www.enerpac.com)

Your Enerpac Distributor: